


CARRIER SLIDING DOOR DBL RAIL

The Carrier sliding door with the double rail can be built with our mesh or polycarbonate panels to fit your chosen machine guard system. The door is built using the standard panel height of 2,050 mm by combining standard panels in the same size. The two door blades runs separately in the aluminum rail at the top, and hook into each other when opened. The panels and posts together with the top rail and door kit are supplied separately for assembly on site. Choose either the 60x40 mm or 80x80 mm posts for your solution. Depending on the risk assessment, you choose the preferred lock for your door; Cylinder Lock or the Troax Safe Lock or any other type of handle solution with or without a safety switch. Standard opening width is approximately 980 mm-2,980 mm.

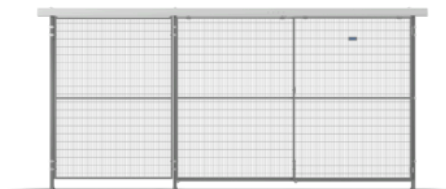


VARIANTS

Art. Nr	Components
36905630	Kit 5630 Carrier door WP
36905630	Kit 5630 Carrier door WP

ASSEMBLY INSTRUCTIONS




Assembly instruction - Carrier door double rail Kit 36905600.pdf

 [Interactive 3D](#)
 [PDF](#)

DOWNLOADS

Name


File type 


Product sheet - CARRIER SLIDING DOOR_ENG.pdf

Product sheets

 [DOWNLOAD](#)

ACCESSORIES






BRACKETS FOR
SAFETY SWITCHES



EURO CYLINDER
LOCK

COMBINE WITH



POST 80X80

PANEL ST30

POST 60X40

PANEL ST20

IMAGES

