


STRONG DOOR







Troax Strong Door is built with our most robust machine guarding products, ST30 mesh panel and 80x80 posts. This door is tested and withstands an impact of 3000 joules equipped with a Safe Lock and Kit Strong Fix Secure Door. If anything hits the door from the inside the hook will catch it, but the door will not be blocked when it is opened from the outside in a normal way. Troax machine guard systems are so versatile that you can convert a standard wall panel in your system to a door, just by adding our door kits. Standard opening width is approximately 500-1,500 mm.

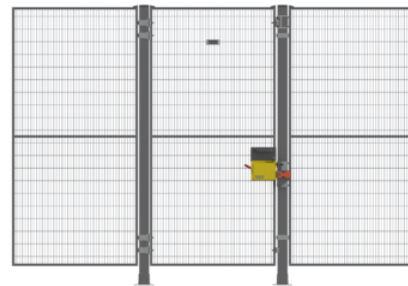



VARIANTS

Art. Nr	Components
36908155	Kit Strong Fix Secure door
36908150	Kit 8150 Hinged door

ASSEMBLY INSTRUCTIONS

	Assembly Instruction - Strong Fix Secure KIT 36908155.pdf	 Interactive 3D	 PDF
	Assembly Instruction - Strong Fix hinged door kit 36908150.pdf	 Interactive 3D	 PDF


DOWNLOADS

Name	File type	
 Product sheet - Strong Door_EN.pdf	Product sheets	 DOWNLOAD

COMBINE WITH



POST 80X80



PANEL ST30



STRONG FIX

IMAGES

