




Ursus[®] AS

Knotted mesh

Ursus AS are specific fencing products for forestry and highways: Ursus AS Light and AS Medium. They are made with high tensile wires.

Product detail

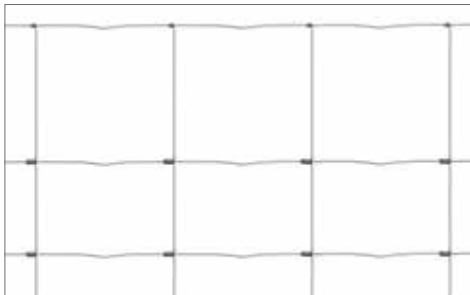

BENEFITS

The Ursus AS range provides a strong (high tensile) professional product. Due to the use of high tensile wires, the fence has an increased resistance to impact and warping. Thanks to these exceptional product qualities, posts only need to be placed every 8 to 10 meters, which makes installing Ursus AS fences 3x faster than other systems!

Ursus AS Light

A low weight but high strength fence. With the smaller mesh apertures at ground level it is effective for small but also bigger animals.


Ursus AS Medium

Heavier wires combined with a Trigalv coating to give maximum performance.

Ursus AS Super

Thicker wires give increased strength. A wide range of sizes to suit all applications.


Security level

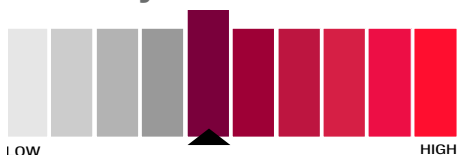

Applications



Functionalities



Ursus AS Light

Coating: Trigalv

line wire: Ø 1,60 mm - 1100/1300 N/mm²

stay wire: Ø 1,60 mm - 400/550 N/mm²

selvedge wire: Ø 2,00 mm - 1200/1400 N/mm²



Urus AS Medium

Coating: Trigalv

line wire: Ø 2,00 mm - 1200/1400 N/mm²

stay wire: Ø 1,90 mm - 400/550 N/mm²

selvedge wire: Ø 2,50 mm - 1150/1350 N/mm²



Ursus AS Super

Coating: Trigalv


line wire: Ø 2,50 mm - 1150/1350 N/mm²

stay wire: Ø 2,50 mm - 400/550 N/mm²

selvedge wire: Ø 3,00 mm - 1050/1250 N/mm²



Mesh dimensions

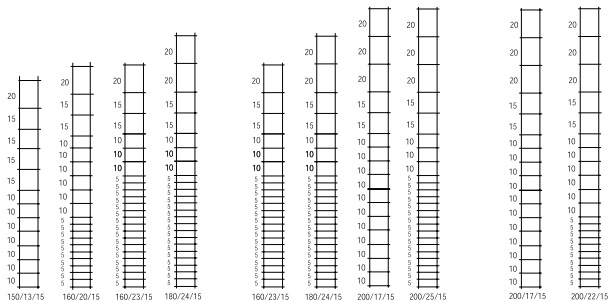

Ursus AS Light

Urusus AS Medium

Ursus AS Super

URSUS AS LIGHT

Roll height cm	N° horizontal wires	Distance between vertical wires cm	Type
Rolls of 50 m			
150	13	15	150/13/15
160	20	15	160/20/15
160	23	15	160/23/15
180	24	15	180/24/15

URSUS AS MEDIUM

Roll height cm	N° horizontal wires	Distance between vertical wires cm	Type
Rolls of 50 m			
160	23	15	160/23/15
180	24	15	180/24/15
200	17	15	200/17/15
200	25	15	200/25/15

URSUS AS SUPER

Roll height cm	N° horizontal wires	Distance between vertical wires cm	Type
Rolls of 50 m			
200	17	15	200/17/15
200	22	15	200/22/15

