



## Tempofor®

### Mobile Fences

Fencing systems for temporary protection and control of people, vehicles and goods.

### Product detail



### BENEFITS

#### Quality and durability

The panels are made out of pre-galvanised or HDG materials for a long-lasting corrosion protection in all weather conditions. Each wire is individually welded to the frame.

#### Flexibility

A wide assortment of panels and accessories provides a solution for any temporary security need. Different connection systems and logistic possibilities offer flexibility in transport and installation.

#### Service

An extended network of suppliers guarantees a qualitative and fast delivery, for both purchase and rental of construction barriers.


### Security level



### Applications




### Functionalities



### Tempofor F range

- F1:** standard mobile fence panel of 1,2 meter height
- F2:** standard mobile fence panel of 2 meter height
- F2 Medium:** light mobile fence panel
- F2 Supermedium:** standard mobile fence panel with extra light tubes and wires
- F2 Super:** mobile fence with reinforced horizontal and vertical tubes and mesh, ideal for heavy duty usage, e.g. for rental.
- F2 Protect:** HDG standard mobile fence of 2 meter height with reinforced corners
- F2 Secure:** anticlimb mobile fence panel with small mesh size
- F3:** standard mobile fence panel with extra horizontal tube for more rigidity
- F3 Maxi:** mobile fence panel of 2,45 m height with extra horizontal tube and smaller mesh size

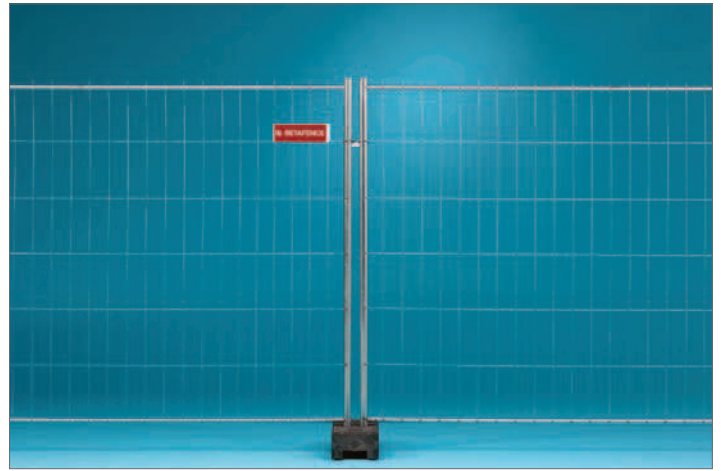


Tempofor F2

### Tempofor B range

Creating privacy for construction sites or events. Heavy duty, hot-dipped galvanised steel frame with profiled & coated steel plate infill. Available in several colour combinations (white, blue, yellow), other colours on request. Compatible with standard mobile fence panels and accessories. Use of braces obligatory.

- B1:** Standard panel of 1,2 m height
- B2:** Standard panel of 2,0 m height
- B3:** Semi-closed version of 2,0 m height

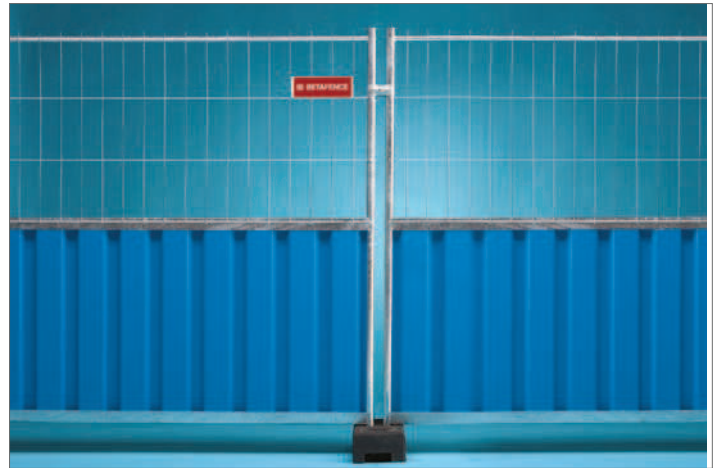


Tempofor B3

### Tempofor C range

- C1:** Guiding panel with reinforced upper guiding rail for crowd control.
- C2:** standard crowd barrier
- C2 Light:** light crowd barrier
- C2 Eventsecure:** Inclined crowd barrier (3m), for extra safety of spectators during cycling events.
- CycloSecure:** Inclined crowd barrier (3m), especially designed for extra safety of both spectators and bikers during cycling or other events.
- C3:** police barrier, maximum stability for controlling big crowds, foldable C3 is also available in a foldable version.
- C6:** Mobile crowd guidance system: for effective entry control to events.



Tempofor F2 Protect

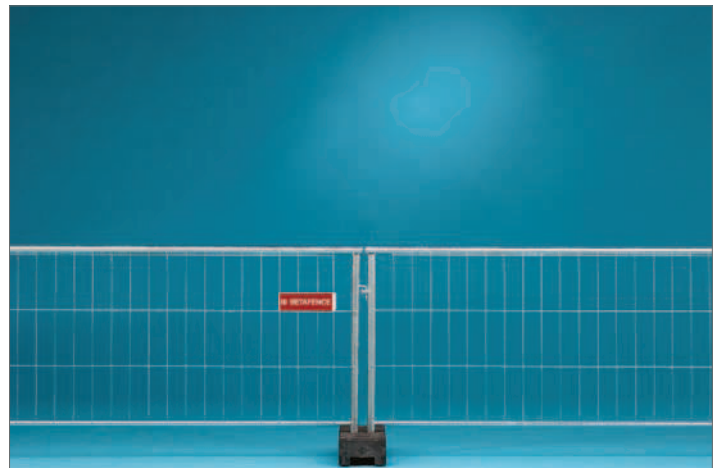

Tempofor C1

Eventsecure



B2



C2: Crowd entrance system



## TEMPOFOR F-RANGE

Type	Description	Dimensions width x height	Mesh size width x height	Wire dia. hor.	Wire dia. vert.	Tube dia. hor.	Tube dia. vert.	Weight kg
F1	standard panel	3454* x 1200	100 x 300	3	3	27	40	10,5
F1	infill panel	2200 x 1200	100 x 300	3	3	27	40	8
F1	gate	1200 x 1200	100 x 300	3	3	27	40	6,5
F2	standard panel	3454* x 2000	100 x 300	3,8	3,4	27	40	16
F2	infill panel	2200 x 2000	100 x 300	3,8	3,4	27	40	11,5
F2	gate	1200 x 2000	100 x 300	3,8	3,4	27	40	7
F2 Medium	standard panel	3454* x 2000	100 x 300	3	2,5	27	40	13
F2 Supermedium	standard panel	3454* x 2000	100 x 300	2,5	2,5	27	40	11,5
F2 Protect	standard panel	3454* x 2000	100 x 300	3	3	27	40	15
F2 Super	standard panel	3454* x 2000	100 x 300	4,5	4	38	40	20
F2 Secure	anticlimb panel	3454* x 2000	30 x 160	3,8	3	27	40	25
F3	standard panel	3454* x 2000	100 x 300	3,4	3	27	40	17
F3	infill panel	2200 x 2000	100 x 300	3,4	3	27	40	12
F3	gate	1200 x 2000	100 x 300	3,4	3	27	40	8,5
F3 Maxi	extra high panel	3454* x 2450	50 x 291	4	4	27	41	33

## TEMPOFOR B-RANGE

Type	Description	Dimensions width x height mm	Profiles horizontal top	Profiles horizontal bottom	Tube dia. vert.	Weight kg
B1	standard panel	2200 x 1200	60 x 40 x 1,5 (U)	60 x 35 x 1,5 (2xL)	41	22
B2	standard panel	2200 x 2000	60 x 40 x 1,5 (2xL)	60 x 35 x 1,5 (U)	41	30
B3	semi-closed panel	2200 x 2000	60 x 40 x 1,5 (U)	60 x 35 x 1,5 (2xL)	41	31

## TEMPOFOR C-RANGE

Type	Description	Dimensions width x height	Mesh size width x height	Wire dia. hor.	Wire dia. vert.	Tube dia. hor.	Tube dia. vert.	Weight kg
C1	crowd barrier	3454* x 1200	100 x 300	4,5	3,8	41	41	17
C2	crowd barrier	2500 x 1100	-	tubes dia 16	-	38	38	19
C2 Light	crowd barrier	2500 x 1100	-	tubes dia 13	-	25	25	16
C2 Eventsecure	crowd barrier	2200 x 1000	-	tubes dia 16	-	38	38	22-26 kg
C2 CycloSecure	crowd barrier	3000 x 1000	-	tubes dia 16	-	38	38	36,5
C3 Hingeable	police barrier	2170 x 1100	-	-	-	34	34	57
C3	police barrier	2070 x 1200	-	tubes dia 20	-	38,5	38,5	39

\* distance between centre of bases = 3500 mm

C2



CycloSecure



## Connection systems

- adjustable brackets with nut and bolt
- hook/eye connection
- wire loops for quick installation
- security connectors for a durable and secure connection



## Accessories



Concrete block



Concrete block light



PE block 16kg



PE block 22kg




PVC block



Pedestal



Steel plate



Mobile plate



Ground anchor/cone



Triangular brace post



Hinge set



Ring



Wheel




Stol-connector




Customer name plate



Security connector (+tool)



Ground pin



Anti-lift device



Barbed wire holder



Barbed wire holder Y



Brace



Curtain 3,5 m / 20 m - blue/black/white

## Logistics



System KP30  
for F-panels and blocks



TP 25 / TP 29

## Turnstiles



Tempofor Turnstile

The Tempofor BF3 Turnstile is designed and built to control and secure access to construction sites, temporary facilities and events.