

Hesco's unparalleled reputation in engineered force protection and flood defense has positioned us to meet a new challenge: to provide the next generation of defensive barriers.

HESCO® JACKBOX™ is our latest in temporary earth-filled, ground-mounted flood defences. Moving beyond traditional wire mesh, JACKBOX provides a self-supporting, light and flexible barrier to protect against flood and storm events.

JACKBOX units feature front facing impermeable material to minimize seepage, while the rest of the unit comprises of a semi-permeable material to allow drainage of water

within the fill material. The unit is also fitted with a lid to prevent loss of fill material during over-topping and extreme weather conditions.


Easy to transport and store, JACKBOX can be carried and deployed quickly by two people. Utilizing the patented, self-supporting structure, JACKBOX can be positioned and filled easily by hand or using earth-moving equipment to instal 20' of barrier in under 20 minutes.

Rapidly deployable and even faster and easier to remove, JACKBOX features an integrated base to allow filled cells to be lifted away individually.

Using mechanical handling equipment, two people can remove over 80 feet of barrier in under 40 minutes.

Tested to the limit - JACKBOX units have successfully undergone full protocol testing at the US Corps of Engineers Research and Development Centre, Vicksburg Mississippi.

- 1..... Lifting loops
- 2..... Impermeable membrane
- 3..... Protective lid
- 4..... Self-supporting hinged units
- 5..... Permeable fabric

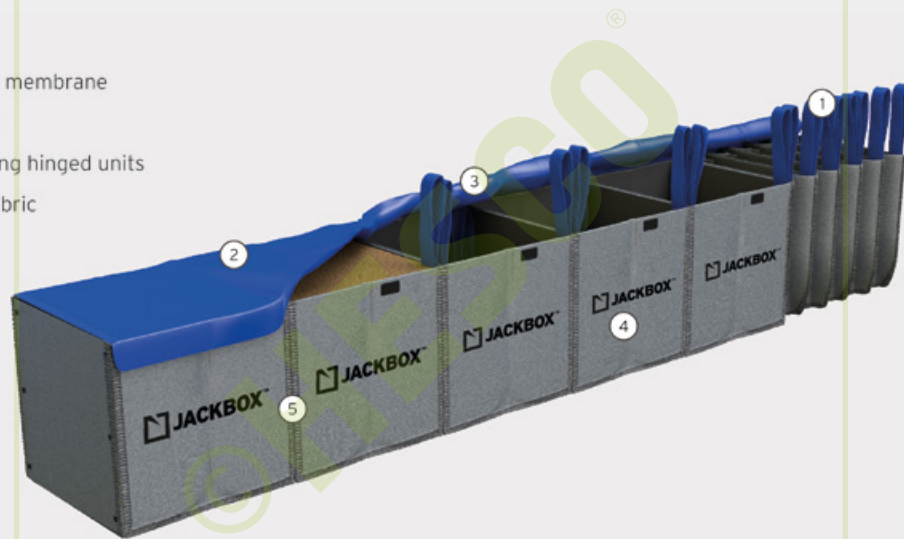


PRODUCT	HEIGHT	WIDTH	LENGTH	NOTES
JB2727	27" (0.7m)	27" (0.7m)	20' (6.1m)	will stop up to 2' of water
JB3939	39" (1m)	39" (1m)	30' (9.15m)	will stop up to 3' of water

hesco.com

The product featured in this publication comes with a 1 year warranty, subject to Hesco's terms and conditions.

For more information about our products and JACKBOX, contact us direct or visit our website at: hesco.com



UK and Rest of World Inquiries
Hesco Bastion Ltd,
Unit 41, Knowsthorpe Way,
Leeds LS9 0SW, United Kingdom
Telephone: +44 113 248 6633

US and Americas Inquiries
Hesco Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409

Email: support@hesco.com

Disclaimer

The information contained in this publication is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection. Copyright © 2016 Hesco. All rights reserved.

Patents and Trademarks

HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details, please go to: www.hesco.com/legal_notice

Quality Standards

Hesco operates a quality management system certified to ISO 9001:2008.