

## Machine guard door

The Telescopic Hinged door gives you the benefits from the sliding telescopic rails in combination with a hinged door that can be fully opened creating free access in height and not taking up any space in width. You build the door using the 80x80 posts and the ST20 or ST30 mesh panels in full system height 2200 mm. Choose from three sizes of door blades: 1800, 2200 or 2700 mm.

The Telescopic Hinged door will be supplied as separate panels, posts and door kit for assembly on site.

Depending on the risk assessment, you choose the preferable lock for your door.



### FACTS


#### Door dimensions, system height 2200 mm

Panel Height (mm)	Width (mm)
2050	800+1000 = 1800 mm
2050	1000+1200 = 2200 mm
2050	1200+1500 = 2700 mm

The door blade must be built with panels of different size. The largest panel shall be put next to the hinges.

Standard colour for the mesh panels are grey RAL7037 and black RAL9005. Standard colour for the 80x80 posts is RAL7037.

Doors can be made in the colour of your choice.

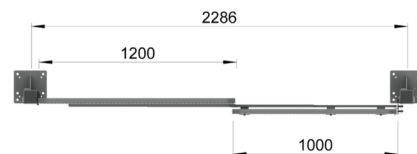

### LOCK OPTIONS

Eurocylinder Lock (Kit 5780)



Safe Lock (Kit 5030)



Safe ES (Kit 5040)

